Chapter 16 The SIMLIN Procedure

Chapter Table of Contents

OVERVIEW
GETTING STARTED
Prediction and Simulation
SYNTAX
Functional Summary
PROC SIMLIN Statement
BY Statement
ENDOGENOUS Statement
EXOGENOUS Statement
ID Statement
LAGGED Statement
OUTPUT Statement
DETAILS
Defining the Structural Form
Computing the Reduced Form
Dynamic Multipliers
Multipliers for Higher Order Lags
EST= Data Set
DATA= Data Set
OUTEST= Data Set
OUT= Data Set
Printed Output
ODS Table Names
EXAMPLES
Example 16.1 Simulating Klein's Model I
Example 16.2 Multipliers for a Third-Order System
REFERENCES

Part 2. General Information

Chapter 16 The SIMLIN Procedure

Overview

The SIMLIN procedure reads the coefficients for a set of linear structural equations, which are usually produced by the SYSLIN procedure. PROC SIMLIN then computes the reduced form and, if input data are given, uses the reduced form equations to generate predicted values. PROC SIMLIN is especially useful when dealing with sets of structural difference equations. The SIMLIN procedure can perform simulation or forecasting of the endogenous variables.

The SIMLIN procedure can be applied only to models that are:

- linear with respect to the parameters
- linear with respect to the variables
- square (as many equations as endogenous variables)
- nonsingular (the coefficients of the endogenous variables form an invertible matrix)

Getting Started

The SIMLIN procedure processes the coefficients in a data set created by the SYSLIN procedure using the OUTEST= option or by another regression procedure such as PROC REG. To use PROC SIMLIN you must first produce the coefficient data set and then specify this data set on the EST= option of the PROC SIMLIN statement. You must also tell PROC SIMLIN which variables are endogenous and which variables are exogenous. List the endogenous variables in an ENDOGENOUS statement, and list the exogenous variables in an EXOGENOUS statement.

The following example illustrates the creation of an OUTEST= data set with PROC SYSLIN and the computation and printing of the reduced form coefficients for the model with PROC SIMLIN.

```
proc syslin data=in outest=e;
  model y1 = y2 x1;
  model y2 = y1 x2;
run;

proc simlin est=e;
  endogenous y1 y2;
  exogenous x1 x2;
run;
```

If the model contains lagged endogenous variables you must also use a LAGGED statement to tell PROC SIMLIN which variables contain lagged values, which endogenous variables they are lags of, and the number of periods of lagging. For dynamic models, the TOTAL and INTERIM= options can be used on the PROC SIMLIN statement to compute and print total and impact multipliers. (See "Dynamic Multipliers" later in this section for an explanation of multipliers.)

In the following example the variables Y1LAG1, Y2LAG1, and Y2LAG2 contain lagged values of the endogenous variables Y1 and Y2. Y1LAG1 and Y2LAG1 contain values of Y1 and Y2 for the previous observation, while Y2LAG2 contains 2 period lags of Y2. The LAGGED statement specifies the lagged relationships, and the TOTAL and INTERIM= options request multiplier analysis. The INTERIM=2 option prints matrices showing the impact that changes to the exogenous variables have on the endogenous variables after 1 and 2 periods.

```
data in; set in;
  yllag1 = lag(y1);
  y2lag1 = lag(y2);
  y2lag2 = lag2(y2);
run;

proc syslin data=in outest=e;
  model y1 = y2 yllag1 y2lag2 x1;
  model y2 = y1 y2lag1 x2;
run;

proc simlin est=e total interim=2;
  endogenous y1 y2;
  exogenous x1 x2;
  lagged yllag1 y1 1 y2lag1 y2 1 y2lag2 y2 2;
run;
```

After the reduced form of the model is computed, the model can be simulated by specifying an input data set on the PROC SIMLIN statement and using an OUTPUT statement to write the simulation results to an output data set. The following example modifies the PROC SIMLIN step from the preceding example to simulate the model and stores the results in an output data set.

Prediction and Simulation

If an input data set is specified with the DATA= option in the PROC SIMLIN statement, the procedure reads the data and uses the reduced form equations to compute predicted and residual values for each of the endogenous variables. (If no data set is specified with the DATA= option, no simulation of the system is performed, and only the reduced form and multipliers are computed.)

The character of the prediction is based on the START= value. Until PROC SIMLIN encounters the START= observation, actual endogenous values are found and fed into the lagged endogenous terms. Once the START= observation is reached, dynamic simulation begins, where predicted values are fed into lagged endogenous terms until the end of the data set is reached.

The predicted and residual values generated here are different from those produced by the SYSLIN procedure since PROC SYSLIN uses the structural form with actual endogenous values. The predicted values computed by the SIMLIN procedure solve the simultaneous equation system. These reduced-form predicted values are functions only of the exogenous and lagged endogenous variables and do not depend on actual values of current period endogenous variables.

Syntax

The following statements can be used with PROC SIMLIN:

PROC SIMLIN options;

BY variables;

ENDOGENOUS variables;

EXOGENOUS variables;

ID variables;

LAGGED lag-var endogenous-var number ellipsis;

OUTPUT OUT=SAS-data-set options;

Functional Summary

The statements and options controlling the SIMLIN procedure are summarized in the following table.

Description	Statement	Option
Data Set Options		
specify input data set containing structural coefficients	PROC SIMLIN	EST=
specify type of estimates read from EST= data set	PROC SIMLIN	TYPE=
write reduced form coefficients and multipliers to an output data set	PROC SIMLIN	OUTEST=
specify the input data set for simulation write predicted and residual values to an output data set	PROC SIMLIN OUTPUT	DATA=
Printing Control Options		
print the structural coefficients	PROC SIMLIN	ESTPRINT
suppress printing of reduced form coefficients	PROC SIMLIN	NORED
suppress all printed output	PROC SIMLIN	NOPRINT
Dynamic Multipliers		
compute interim multipliers	PROC SIMLIN	INTERIM=
compute total multipliers	PROC SIMLIN	TOTAL
Declaring the Role of Variables		
specify BY-group processing	BY	
specify the endogenous variables	ENDOGENOUS	
specify the exogenous variables	EXOGENOUS	
specify identifying variables	ID	
specify lagged endogenous variables	LAGGED	

Description	Statement	Option
Controlling the Simulation specify the starting observation for dynamic simulation	PROC SIMLIN	START=

PROC SIMLIN Statement

PROC SIMLIN options;

The following options can be used in the PROC SIMLIN statement:

DATA= SAS-data-set

specifies the SAS data set containing input data for the simulation. If the DATA= option is used, the data set specified must supply values for all exogenous variables throughout the simulation. If the DATA= option is not specified, no simulation of the system is performed, and only the reduced form and multipliers are computed.

EST= SAS-data-set

specifies the input data set containing the structural coefficients of the system. If EST= is omitted the most recently created SAS data set is used. The EST= data set is normally a "TYPE=EST" data set produced by the OUTEST= option of PROC SYSLIN. However, you can also build the EST= data set with a SAS DATA step. See "The EST= Data Set" later in this chapter for details.

ESTPRINT

prints the structural coefficients read from the EST= data set.

INTERIM= n

rssbjixinterim multipliersSIMLIN procedure equests that interim multipliers be computed for interims 1 through n. If not specified, no interim multipliers are computed. This feature is available only if there are no lags greater than**NOPRINT** suppresses all printed output.

NORED

suppresses the printing of the reduced form coefficients.

OUTEST= SAS-data-set

specifies an output SAS data set to contain the reduced form coefficients and multipliers, in addition to the structural coefficients read from the EST= data set. The OUTEST= data set has the same form as the EST= data set. If the OUTEST= option is not specified, the reduced form coefficients and multipliers are not written to a data set.

START= n

specifies the observation number in the DATA= data set where the dynamic simulation is to be started. By default, the dynamic simulation starts with the first observation in the DATA= data set for which all variables (including lags) are not missing.

TOTAL

requests that the total multipliers be computed. This feature is available only if there are no lags greater than 1.

TYPE= value

specifies the type of estimates to be read from the EST= data set. The TYPE= value must match the value of the _TYPE_ variable for the observations that you want to select from the EST= data set (TYPE=2SLS, for example).

BY Statement

BY variables:

A BY statement can be used with PROC SIMLIN to obtain separate analyses for groups of observations defined by the BY variables.

The BY statement can be applied to one or both of the EST= and the DATA= input data set. When a BY statement is used and both an EST= and a DATA= input data set are specified, PROC SIMLIN checks to see if one or both of the data sets contain the BY variables.

Thus, there are three ways of using the BY statement with PROC SIMLIN:

- 1. If the BY variables are found in the EST= data set only, PROC SIMLIN simulates over the entire DATA= data set once for each set of coefficients read from the BY groups in the EST= data set.
- 2. If the BY variables are found in the DATA= data set only, PROC SIMLIN performs separate simulations over each BY group in the DATA= data set, using the single set of coefficients in the EST= data set.
- 3. If the BY variables are found in both the EST= and the DATA= data sets, PROC SIMLIN performs separate simulations over each BY group in the DATA= data set using the coefficients from the corresponding BY group in the EST= data set.

ENDOGENOUS Statement

ENDOGENOUS variables;

List the names of the endogenous (jointly dependent) variables in the ENDOGE-NOUS statement. The ENDOGENOUS statement can be abbreviated as ENDOG or ENDO.

EXOGENOUS Statement

EXOGENOUS variables;

List the names of the exogenous (independent) variables in the EXOGENOUS statement. The EXOGENOUS statement can be abbreviated as EXOG or EXO.

ID Statement

ID variables;

The ID statement can be used to restrict the variables copied from the DATA= data set to the OUT= data set. Use the ID statement to list the variables you want copied to the OUT= data set besides the exogenous, endogenous, lagged endogenous, and BY variables. If the ID statement is omitted, all the variables in the DATA= data set are copied to the OUT= data set.

LAGGED Statement

LAGGED lag-var endogenous-var number ellipsis;

For each lagged endogenous variable, specify the name of the lagged variable, the name of the endogenous variable that was lagged, and the degree of the lag. Only one LAGGED statement is allowed.

The following is an example of the use of the LAGGED statement:

```
proc simlin est=e;
  endog y1 y2;
  lagged y1lag1 y1 1    y2lag1 y2 1    y2lag3 y2 3;
```

This statement specifies that the variable Y1LAG1 contains the values of the endogenous variable Y1 lagged one period; the variable Y2LAG1 refers to the values of Y2 lagged one period; and the variable Y2LAG3 refers to the values of Y2 lagged three periods.

OUTPUT Statement

OUTPUT *OUT= SAS-data-set options;*

The OUTPUT statement specifies that predicted and residual values be put in an output data set. A DATA= input data set must be supplied if the OUTPUT statement is used, and only one OUTPUT statement is allowed. The following options can be used in the OUTPUT statement:

OUT= SAS-data-set

names the output SAS data set to contain the predicted values and residuals. If OUT= is not specified, the output data set is named using the DATA*n* convention.

PREDICTED= names

P= names

names the variables in the output data set that contain the predicted values of the simulation. These variables correspond to the endogenous variables in the order in which they are specified in the ENDOGENOUS statement. Specify up to as many names as there are endogenous variables. If you specify names on the PREDICTED= option for only some of the endogenous variables, predicted values for the remaining variables are not output. The names must not match any variable name in the input data set.

RESIDUAL= names

R= names

names the variables in the output data set that contain the residual values from the simulation. The residuals are the differences between the actual values of the endogenous variables from the DATA= data set and the predicted values from the simulation. These variables correspond to the endogenous variables in the order in which they are specified in the ENDOGENOUS statement. Specify up to as many names as there are endogenous variables. The names must not match any variable name in the input data set.

The following is an example of the use of the OUTPUT statement. This example outputs predicted values for Y1 and Y2 and outputs residuals for Y1.

```
proc simlin est=e;
  endog y1 y2;
  output out=b predicted=y1hat y2hat residual=y1resid;
```

Details

The following sections explain the structural and reduced forms, dynamic multipliers, input data sets, and the model simulation process in more detail.

Defining the Structural Form

An EST= input data set supplies the coefficients of the equation system. The data set containing the coefficients is normally a "TYPE=EST" data set created by the OUTEST= option of PROC SYSLIN or another regression procedure. The data set contains the special variables _TYPE_, _DEPVAR_, and INTERCEPT. You can also supply the structural coefficients of the system to PROC SIMLIN in a data set produced by a SAS DATA step as long as the data set is of the form TYPE=EST. Refer to SAS/STAT software documentation for a discussion of the special TYPE=EST type of SAS data set.

Suppose that there is a $g \times 1$ vector of endogenous variables \mathbf{y}_t , an $l \times 1$ vector of lagged endogenous variables \mathbf{y}_t^L , and a $k \times 1$ vector of exogenous variables \mathbf{x}_t , including the intercept. Then, there are g structural equations in the simultaneous system that can be written

$$\mathbf{G}\mathbf{y}_t = \mathbf{C}\mathbf{y}_t^L + \mathbf{B}\mathbf{x}_t$$

where G is the matrix of coefficients of current period endogenous variables, C is the matrix of coefficients of lagged endogenous variables, and B is the matrix of coefficients of exogenous variables. G is assumed to be nonsingular.

Computing the Reduced Form

First, the SIMLIN procedure computes reduced form coefficients by premultiplying by \mathbf{G}^{-1} :

$$\mathbf{y}_t = \mathbf{G}^{-1} \mathbf{C} \mathbf{y}_t^L + \mathbf{G}^{-1} \mathbf{B} \mathbf{x}_t$$

This can be written as

$$\mathbf{y}_t = \Pi_1 \mathbf{y}_t^L + \Pi_2 \mathbf{x}_t$$

where $\Pi_1 = \mathbf{G}^{-1}\mathbf{C}$ and $\Pi_2 = \mathbf{G}^{-1}\mathbf{B}$ are the reduced form coefficient matrices.

The reduced form matrices $\Pi_1 = \mathbf{G}^{-1}\mathbf{C}$ and $\Pi_2 = \mathbf{G}^{-1}\mathbf{B}$ are printed unless the NORED option is specified in the PROC SIMLIN statement. The structural coefficient matrices \mathbf{G} , \mathbf{C} , and \mathbf{B} are printed when the ESTPRINT option is specified.

Dynamic Multipliers

For models that have only first-order lags, the equation of the reduced form of the system can be rewritten

$$\mathbf{y}_t = \mathbf{D}\mathbf{y}_{t-1} + \Pi_2 \mathbf{x}_t$$

D is a matrix formed from the columns of Π_1 plus some columns of zeros, arranged in the order in which the variables meet the lags. The elements of Π_2 are called *impact multipliers* because they show the immediate effect of changes in each exogenous variable on the values of the endogenous variables. This equation can be rewritten as

$$\mathbf{y}_t = \mathbf{D}^2 \mathbf{y}_{t-2} + \mathbf{D} \Pi_2 \mathbf{x}_{t-1} + \Pi_2 \mathbf{x}_t$$

The matrix formed by the product $\mathbf{D}\Pi_2$ shows the effect of the exogenous variables one lag back; the elements in this matrix are called *interim multipliers* and are computed and printed when the INTERIM= option is specified in the PROC SIMLIN statement. The *i*th period interim multipliers are formed by $\mathbf{D}^i\Pi_2$.

The series can be expanded as

$$\mathbf{y}_t = \mathbf{D}^{\infty} \mathbf{y}_{t-\infty} + \sum_{i=0}^{\infty} \mathbf{D}^i \Pi_2 \mathbf{x}_{t-i}$$

A permanent and constant setting of a value for x has the following cumulative effect:

$$\left(\sum_{i=0}^{\infty} \mathbf{D}^{i}\right) \Pi_{2} \mathbf{x} = (\mathbf{I} - \mathbf{D})^{-1} \Pi_{2} \mathbf{x}$$

The elements of $(\mathbf{I}-\mathbf{D})^{-1}\Pi_2$ are called the *total multipliers*. Assuming that the sum converges and that $(\mathbf{I}-\mathbf{D})$ is invertible, PROC SIMLIN computes the total multipliers when the TOTAL option is specified in the PROC SIMLIN statement.

Multipliers for Higher Order Lags

The dynamic multiplier options require the system to have no lags of order greater than one. This limitation can be circumvented, since any system with lags greater than one can be rewritten as a system where no lag is greater than one by forming new endogenous variables that are single-period lags.

For example, suppose you have the third-order single equation

$$y_t = ay_{t-3} + b\mathbf{x}_t$$

This can be converted to a first-order three-equation system by introducing two additional endogenous variables, $y_{1,t}$ and $y_{2,t}$, and computing corresponding first-order

lagged variables for each endogenous variable: y_{t-1} , $y_{1,t-1}$, and $y_{2,t-1}$. The higher order lag relations are then produced by adding identities to link the endogenous and identical lagged endogenous variables:

$$y_{1,t} = y_{t-1}$$

 $y_{2,t} = y_{1,t-1}$
 $y_t = ay_{2,t-1} + b\mathbf{X}_t$

This conversion using the SYSLIN and SIMLIN procedures requires three steps:

- 1. Add the extra endogenous and lagged endogenous variables to the input data set using a DATA step. Note that two copies of each lagged endogenous variable are needed for each lag reduced, one to serve as an endogenous variable and one to serve as a lagged endogenous variable in the reduced system.
- 2. Add IDENTITY statements to the PROC SYSLIN step to equate each added endogenous variable to its lagged endogenous variable copy.
- 3. In the PROC SIMLIN step, declare the added endogenous variables in the ENDOGENOUS statement and define the lag relations in the LAGGED statement.

See Example 16.2 for an illustration of how to convert an equation system with higher-order lags into a larger system with only first-order lags.

EST= Data Set

Normally, PROC SIMLIN uses an EST= data set produced by PROC SYSLIN with the OUTEST= option. This data set is in the form expected by PROC SIMLIN. If there is more than one set of estimates produced by PROC SYSLIN, you must use the TYPE= option in the PROC SIMLIN statement to select the set to be simulated. Then PROC SIMLIN reads from the EST= data set only those observations with a _TYPE_ value corresponding to the TYPE= option (for example, TYPE=2SLS) or with a _TYPE_ value of IDENTITY.

The SIMLIN procedure can only solve square, nonsingular systems. If you have fewer equations than endogenous variables, you must specify IDENTITY statements in the PROC SYSLIN step to bring the system up to full rank. If there are g endogenous variables and m < g stochastic equations with unknown parameters, then you use m MODEL statements to specify the equations with parameters to be estimated and you must use g-m IDENTITY statements to complete the system.

You can build your own EST= data set with a DATA step rather than use PROC SYS-LIN. The EST= data set must contain the endogenous variables, the lagged endogenous variables (if any), and the exogenous variables in the system (if any). If any of the equations have intercept terms, the variable INTERCEPT must supply these coefficients. The EST= data set should also contain the special character variable comp _DEPVAR_ to label the equations.

The EST= data set must contain one observation for each equation in the system. The values of the lagged endogenous variables must contain the **C** coefficients. The values of the exogenous variables and the INTERCEPT variable must contain the **B** coefficients. The values of the endogenous variables, however, must contain the negatives of the **G** coefficients. This is because the SYSLIN procedure writes the coefficients to the OUTEST= data set in the form

$$0 = \mathbf{H}\mathbf{y}_t + \mathbf{C}\mathbf{y}_t^L + \mathbf{B}\mathbf{x}_t$$

where $\mathbf{H}=-\mathbf{G}$.

See "Multipliers for Higher Order Lags" and Example 16.2 later in this chapter for more information on building the EST= data set.

DATA= Data Set

The DATA= data set must contain all of the exogenous variables. Values for all of the exogenous variables are required for each observation for which predicted endogenous values are desired. To forecast past the end of the historical data, the DATA= data set should contain nonmissing values for all of the exogenous variables and missing values for the endogenous variables for the forecast periods, in addition to the historical data. (See Example 16.1 for an illustration.)

In order for PROC SIMLIN to output residuals and compute statistics of fit, the DATA= data set must also contain the endogenous variables with nonmissing actual values for each observation for which residuals and statistics are to be computed.

If the system contains lags, initial values must be supplied for the lagged variables. This can be done by including either the lagged variables or the endogenous variables, or both, in the DATA= data set. If the lagged variables are not in the DATA= data set or if they have missing values in the early observations, PROC SIMLIN prints a warning and uses the endogenous variable values from the early observations to initialize the lags.

OUTEST= Data Set

The OUTEST= data set contains all the variables read from the EST= data set. The variables in the OUTEST= data set are as follows.

- the BY statement variables, if any
- _TYPE_, a character variable that identifies the type of observation
- _DEPVAR_, a character variable containing the name of the dependent variable for the observation
- the endogenous variables
- the lagged endogenous variables
- the exogenous variables
- INTERCEPT, a numeric variable containing the intercept values

- _MODEL_, a character variable containing the name of the equation
- _SIGMA_, a numeric variable containing the estimated error variance of the equation (output only if present in the EST= data set)

The observations read from the EST= data set that supply the structural coefficients are copied to the OUTEST= data set, except that the signs of endogenous coefficients are reversed. For these observations, the _TYPE_ variable values are the same as in the EST= data set.

In addition, the OUTEST= data set contains observations with the following _TYPE_ values:

REDUCED

the reduced form coefficients. The endogenous variables for this group of observations contain the inverse of the endogenous coefficient matrix \mathbf{G} . The lagged endogenous variables contain the matrix $\Pi_1 = \mathbf{G}^{-1}\mathbf{C}$. The exogenous variables contain the matrix $\Pi_2 = \mathbf{G}^{-1}\mathbf{B}$.

IMULTi

the interim multipliers, if the INTERIM= option is specified. There are gn observations for the interim multipliers, where g is the number of endogenous variables and n is the value of the INTERIM=n option. For these observations the _TYPE_ variable has the value IMULTi, where the interim number i ranges from 1 to n.

The exogenous variables in groups of g observations that have a _TYPE_ value of IMULTi contain the matrix $\mathbf{D}^{i}\Pi_{2}$ of multipliers at interim i. The endogenous and lagged endogenous variables for this group of observations are set to missing.

TOTAL

the total multipliers, if the TOTAL option is specified. The exogenous variables in this group of observations contain the matrix $(\mathbf{I}\mathbf{-D})^{-1}\Pi_2$. The endogenous and lagged endogenous variables for this group of observations are set to missing.

OUT= Data Set

The OUT= data set normally contains all of the variables in the input DATA= data set, plus the variables named in the PREDICTED= and RESIDUAL= options in the OUTPUT statement.

You can use an ID statement to restrict the variables that are copied from the input data set. If an ID statement is used, the OUT= data set contains only the BY variables (if any), the ID variables, the endogenous and lagged endogenous variables (if any), the exogenous variables, plus the PREDICTED= and RESIDUAL= variables.

The OUT= data set contains an observation for each observation in the DATA= data set. When the actual value of an endogenous variable is missing in the DATA= data set, or when the DATA= data set does not contain the endogenous variable, the corresponding residual is missing.

Printed Output

Structural Form

The following items are printed as they are read from the EST= input data set. Structural zeros are printed as dots in the listing of these matrices.

- 1. Structural Coefficients for Endogenous Variables. This is the **G** matrix, with *g* rows and *g* columns.
- 2. Structural Coefficients for Lagged Endogenous Variables. These coefficients make up the **C** matrix, with *g* rows and *l* columns.
- 3. Structural Coefficients for Exogenous Variables. These coefficients make up the $\bf B$ matrix, with g rows and k columns.

Reduced Form

- The reduced form coefficients are obtained by inverting G so that the endogenous variables can be directly expressed as functions of only lagged endogenous and exogenous variables.
- 2. Inverse Coefficient Matrix for Endogenous Variables. This is the inverse of the **G** matrix.
- 3. Reduced Form for Lagged Endogenous Variables. This is $\Pi_1 = \mathbf{G}^{-1}\mathbf{C}$, with g rows and l columns. Each value is a dynamic multiplier that shows how past values of lagged endogenous variables affect values of each of the endogenous variables.
- 4. Reduced Form for Exogenous Variables. This is $\Pi_2 = \mathbf{G}^{-1}\mathbf{B}$, with g rows and k columns. Its values are called *impact multipliers* because they show the immediate effect of each exogenous variable on the value of the endogenous variables.

Multipliers

Interim and total multipliers show the effect of a change in an exogenous variable over time.

- 1. Interim Multipliers. These are the interim multiplier matrices. They are formed by multiplying Π_2 by powers of **D**. The *d*th interim multiplier is $\mathbf{D}^d\Pi_2$. The interim multiplier of order *d* shows the effects of a change in the exogenous variables after *d* periods. Interim multipliers are only available if the maximum lag of the endogenous variables is 1.
- 2. Total Multipliers. This is the matrix of total multipliers, $T=(\mathbf{I}-\mathbf{D})^{-1}\Pi_2$. This matrix shows the cumulative effect of changes in the exogenous variables. Total multipliers are only available if the maximum lag is one.

Statistics of Fit

If the DATA= option is used and the DATA= data set contains endogenous variables, PROC SIMLIN prints a statistics-of-fit report for the simulation. The statistics printed include the following. (Summations are over the observations for which both y_t and \hat{y}_t are nonmissing.)

- 1. the number of nonmissing errors. (Number of observations for which both y_t and \hat{y}_t are nonmissing.)
- 2. the mean error: $\frac{1}{n}\sum (y_t \hat{y}_t)$
- 3. the mean percent error: $\frac{100}{n}\sum \frac{(y_t-\hat{y}_t)}{y_t}$
- 4. the mean absolute error: $\frac{1}{n}\sum |y_t \hat{y}_t|$
- 5. the mean absolute percent error $\frac{100}{n}\sum \frac{|y_t-\hat{y}_t|}{y_t}$
- 6. the root mean square error: $\sqrt{\frac{1}{n}\sum(y_t \hat{y}_t)^2}$
- 7. the root mean square percent error: $\sqrt{\frac{100}{n}\sum(\frac{(y_t-\hat{y}_t)}{y_t})^2}$

ODS Table Names

PROC SIMLIN assigns a name to each table it creates. You can use these names to reference the table when using the Output Delivery System (ODS) to select tables and create output data sets. These names are listed in the following table. For more information on ODS, see Chapter 6, "Using the Output Delivery System."

Table 16.1. ODS Tables Produced in PROC SIMLIN

ODS Table Name	Description	Option
Endogenous	Structural Coefficients for Endogenous	default
	Variables	
LaggedEndogenous	Structural Coefficients for Lagged Endoge-	default
	nous Variables	
Exogenous	Coefficients for Exogenous Variables	default
Structural		
InverseCoeff	Inverse Coefficient Matrix for Endogenous	default
	Variables	
RedFormLagEndo	Reduced Form for Lagged Endogenous	default
	Variables	
RedFormExog	Reduced Form for Exogenous Variables	default
InterimMult	Interim Multipliers	INTERIM= option
TotalMult	Total Multipliers	TOTAL= option
FitStatistics	Fit statistics	default

Examples

Example 16.1. Simulating Klein's Model I

In this example, the SIMLIN procedure simulates a model of the U.S. economy called Klein's Model I. The SAS data set KLEIN, shown in Output 16.1.1, is used as input to the SYSLIN and SIMLIN procedures.

```
data klein;
   input year c p w i x wp g t k wsum;
   date=mdy(1,1,year);
   format date year.;
       =c+i+g-t;
   yr =year-1931;
   klag=lag(k);
   plag=lag(p);
   xlag=lag(x);
   if year>=1921;
   label c ='consumption'
         p ='profits'
         w ='private wage bill'
         i ='investment'
         k
            ='capital stock'
            ='national income'
         У
            ='private production'
         wsum='total wage bill'
         wp ='govt wage bill'
             ='govt demand'
             ='taxes'
         klag='capital stock lagged'
         plag='profits lagged'
         xlag='private product lagged'
         yr ='year-1931';
   datalines;
  ... data lines omitted ...
proc print data=klein;
run;
```

Output 16.1.1. PROC PRINT Listing of Input Data Set KLEIN

```
wsum
                                                                           date
                                                                                              klag plag xlag
                   р
                                            wp
                                                                                    У
                              -0.2
                                                        7.7
                                                             182.6
    1921
          41.9
                12.4
                       25.5
                                    45.6
                                                 3.9
                                                                     28.2
                                                                           1921
                                                                                  37.9
                                                                                        -10
                                                                                             182.8
                                                                                                     12.7
    1922
          45.0
                16.9
                       29.3
                              1.9
                                    50.1
                                           2.9
                                                 3.2
                                                       3.9
                                                             184.5
                                                                    32.2
                                                                           1922
                                                                                  46.2
                                                                                         -9
                                                                                             182.6
                                                                                                     12.4
                                                                                                            45.6
                                                             189.7
                                                                                             184.5
    1923
          49.2
                                    57.2
                                                 2.8
                                                       4.7
                                                                     37.0
                                                                           1923
                                                                                  52.5
                                                                                         -8
                 18.4
                       34.1
                               5.2
                                           2.9
                                                                                                     16.9
                                                                                                            50.1
                                                                                             189.7
    1924
                                    57.1
                                                             192.7
                                                                                                     18.4
                                                                                                            57.2
          50.6
                 19.4
                       33.9
                               3.0
                                           3.1
                                                 3.5
                                                       3.8
                                                                     37.0
                                                                           1924
                                                                                  53.3
    1925
          52.6
                 20.1
                       35.4
                                    61.0
                                           3.2
                                                 3.3
                                                        5.5
                                                             197.8
                                                                     38.6
                                                                           1925
                                                                                  55.5
                                                                                         -6
                                                                                             192.7
                                                                                                     19.4
                                                                                                            57.1
                               5.1
                       37.4
                                                             203.4
    1926
          55.1
                 19.6
                               5.6
                                    64.0
                                           3.3
                                                 3.3
                                                        7.0
                                                                     40.7
                                                                           1926
                                                                                  57.0
                                                                                             197.8
                                                                                                     20.1
    1927
          56.2
                 19.8
                       37.9
                               4.2
                                    64.4
                                                             207.6
                                                                     41.5
                                                                           1927
                                                                                  57.7
                                                                                         -4
                                                                                             203.4
                                                                                                     19.6
                                           3.6
                                                 4.0
                                                       6.7
                                                                                                            64.0
    1928
                                                                                             207.6
          57.3
                 21.1
                       39.2
                               3.0
                                    64.5
                                           3.7
                                                 4.2
                                                        4.2
                                                             210.6
                                                                     42.9
                                                                           1928
                                                                                  60.3
                                                                                         -3
                                                                                                     19.8
                                                                                                            64.4
    1929
          57.8
                                    67.0
                                                             215.7
                                                                     45.3
                                                                           1929
                                                                                  63.0
                                                                                         -2
                                                                                             210.6
                 21.7
                       41.3
                               5.1
                                           4.0
                                                 4.1
                                                        4.0
                                                                                                     21.1
                                                                                                            64.5
    1930
                       37.9
                                                             216.7
                                                                           1930
                                                                                         -1
                                                                                             215.7
10
          55.0
                 15.6
                               1.0
                                    61.2
                                           4.2
                                                 5.2
                                                       7.7
                                                                     42.1
                                                                                  53.5
                                                                                                     21.7
                                                                                                            67.0
11
    1931
                       34.5
                                                       7.5
                                                             213.3
                                                                     39.3
                                                                                  45.9
                                                                                             216.7
          50.9
                 11.4
                              -3.4
                                    53.4
                                           4.8
                                                 5.9
                                                                           1931
                                                                                                     15.6
                                                                                                            61.2
                                                                                             213.3
12
    1932
          45.6
                 7.0
                       29.0
                              -6.2
                                    44.3
                                           5.3
                                                 4.9
                                                       8.3
                                                             207.1
                                                                     34.3
                                                                           1932
                                                                                  36.0
                                                                                                     11.4
                                                                                                            53.4
13
    1933
          46.5
                 11.2
                       28.5
                              -5.1
                                    45.1
                                           5.6
                                                 3.7
                                                       5.4
                                                             202.0
                                                                     34.1
                                                                           1933
                                                                                  39.7
                                                                                             207.1
                                                                                                      7.0
                                                                                                            44.3
    1934
          48.7
                 12.3
                       30.6
                              -3.0
                                    49.7
                                           6.0
                                                 4.0
                                                       6.8
                                                             199.0
                                                                     36.6
                                                                           1934
                                                                                  42.9
                                                                                             202.0
                                                                                                     11.2
                                                                                                            45.1
14
15
    1935
          51.3
                14.0
                       33.2
                              -1.3
                                    54.4
                                           6.1
                                                 4.4
                                                       7.2
                                                             197.7
                                                                     39.3
                                                                           1935
                                                                                  47.2
                                                                                          4
                                                                                             199.0
                                                                                                     12.3
                                                                                                            49.7
                                                                                             197.7
16
    1936
          57.7
                 17.6
                       36.8
                               2.1
                                    62.7
                                           7.4
                                                 2.9
                                                        8.3
                                                             199.8
                                                                     44.2
                                                                           1936
                                                                                  54.4
                                                                                                     14.0
                                                                                                            54.4
          58.7
17
    1937
                 17.3
                       41.0
                               2.0
                                    65.0
                                           6.7
                                                 4.3
                                                       6.7
                                                             201.8
                                                                     47.7
                                                                           1937
                                                                                  58.3
                                                                                             199.8
                                                                                                     17.6
                                                                                                            62.7
    1938
                              -1.9
                                    60.9
                                           7.7
                                                                                             201.8
18
          57.5
                15.3
                       38.2
                                                 5.3
                                                       7.4
                                                             199.9
                                                                     45.9
                                                                           1938
                                                                                  53.5
                                                                                                     17.3
                                                                                                            65.0
19
    1939
          61.6
                19.0
                       41.6
                               1.3
                                    69.5
                                           7.8
                                                 6.6
                                                       8.9
                                                             201.2
                                                                     49.4
                                                                           1939
                                                                                  60.6
                                                                                          8
                                                                                             199.9
                                                                                                     15.3
                                                                                                            60.9
20
    1940
          65.0
                21.1
                       45.0
                               3.3
                                    75.7
                                           8.0
                                                 7.4
                                                       9.6
                                                             204.5
                                                                    53.0
                                                                           1940
                                                                                  66.1
                                                                                             201.2
                                                                                                     19.0
                                                                                                            69.5
21
    1941
          69.7
                 23.5
                       53.3
                               4.9
                                    88.4
                                           8.5
                                                13.8
                                                       11.6
                                                             209.4
                                                                     61.8
                                                                           1941
                                                                                  76.8
                                                                                         10
                                                                                             204.5
                                                                                                     21.1
                                                                                                            75.7
22
    1942
                                           8.5
                                                13.8
                                                      11.6
                                                                           1942
                                                                                         11
                                                                                             209.4
                                                                                                     23.5
                                                                                                            88.4
23
    1943
                                           8.5
                                                13.8
                                                      12.6
                                                                           1943
                                                                                         12
24
    1944
                                           8.5
                                                13.8
                                                      11.6
                                                                           1944
                                                                                         13
25
    1945
                                           8.5
                                                13.8
                                                      11.6
                                                                           1945
                                                                                         14
26
    1946
                                           8.5
                                                13.8
                                                       11.6
                                                                           1946
                                                                                         15
27
    1947
                                           8.5
                                                13.8
                                                      11.6
                                                                           1947
                                                                                         16
```

First, the model is specified and estimated using the SYSLIN procedure, and the parameter estimates are written to an OUTEST= data set. The printed output produced by the SYSLIN procedure is not shown here; see Example 19.1 in Chapter 19 for the printed output of the PROC SYSLIN step.

```
title1 'Simulation of Klein''s Model I using SIMLIN';
proc syslin 3sls data=klein outest=a;
   instruments klag plag xlag wp g t yr;
   endogenous c p w i x wsum k y;
   consume: model
                     c = p plag wsum;
   invest: model
                     i = p plag klag;
   labor:
            model
                     w = x x lag yr;
  product: identity x = c + i + g;
   income:
            identity y = c + i + g - t;
   profit:
            identity p = x - w - t;
   stock:
            identity k = klag + i;
            identity wsum = w + wp;
   wage:
run;
proc print data=a;
run;
```

The OUTEST= data set A created by the SYSLIN procedure contains parameter estimates to be used by the SIMLIN procedure. The OUTEST= data set is shown in Output 16.1.2.

Output 16.1.2. The OUTEST= Data Set Created by PROC SYSLIN

1 2 3	INST			_DEPVAR	_	_SIGMA_	Intercep	•	klag	plag	_	
3		0 Converg	ed FIRST	С		2.11403	58.3018	1	-0.14654	0.74803	0.23007	
	INST	0 Converg	ed FIRST	р		2.18298	50.3844		-0.21610	0.80250	0.02200	
	INST	0 Converg	ed FIRST	w		1.75427	43.4356		-0.12295	0.87192	0.09533	
4	INST	0 Converg	ed FIRST	i		1.72376	35.5182	2	-0.19251	0.92639	-0.11274	
5	INST	0 Converg	ed FIRST	x		3.77347	93.8200)	-0.33906	1.67442	0.11733	
6	INST	0 Converg	ed FIRST	wsum		1.75427	43.4356		-0.12295	0.87192	0.09533	
7	INST	0 Converg	ed FIRST	k		1.72376	35.5182	2	0.80749	0.92639	-0.11274	
8	INST	0 Converg	ed FIRST	У		3.77347	93.8200)	-0.33906	1.67442	0.11733	
9	3SLS	0 Converg	ed CONSUME	C		1.04956	16.4408	}	•	0.16314	•	
10	3SLS	0 Converg	ed INVEST	i		1.60796	28.1778	}	-0.19485	0.75572		
11	3SLS	0 Converg	ed LABOR	w		0.80149	1.7972	2			0.18129	
12	IDENTITY	0 Converg	ed PRODUCT	x			0.0000)				
13	IDENTITY	0 Converg	ed INCOME	У			0.0000)	•			
14	IDENTITY	0 Converg	ed PROFIT	p			0.0000)				
15	IDENTITY	0 Converg	ed STOCK	k			0.0000)	1.00000			
16	IDENTITY	0 Converg	ed WAGE	wsum		•	0.0000)	•	•	•	
Obs	wp	g	t	yr	С	р	w	i	x	wsum	k	У
1	0.19327	0.20501	-0.36573	0.70109	-1				•			
2	-0.07961	0.43902	-0.92310	0.31941		-1.00000			•			
3	-0.44373	0.86622	-0.60415	0.71358			-1		•			
4	-0.71661	0.10023	-0.16152	0.33190				-1				
5	-0.52334	1.30524	-0.52725	1.03299					-1.00000			
6	0.55627	0.86622	-0.60415	0.71358					•	-1.00000	•	
7	-0.71661	0.10023	-0.16152	0.33190					•		-1	
8	-0.52334	1.30524	-1.52725	1.03299					•		•	-1
9			•	•	-1	0.12489			•	0.79008	•	
10			•	•		-0.01308		-1	•		•	
11			•	0.14967			-1		0.40049		•	
12	•	1.00000	•	•	1		•	1	-1.00000		•	
13		1.00000	-1.00000	•	1			1	•		•	-1
14			-1.00000			-1.00000	-1		1.00000			
15	•		•					1	•		-1	

Using the OUTEST= data set A produced by the SYSLIN procedure, the SIMLIN procedure can now compute the reduced form and simulate the model. The following statements perform the simulation.

The reduced form coefficients and multipliers are added to the information read from EST= data set A and written to the OUTEST= data set B. The predicted and residual values from the simulation are written to the OUT= data set C specified in the OUTPUT statement.

The SIMLIN procedure first prints the structural coefficient matrices read from the EST= data set, as shown in Output 16.1.3.

Output 16.1.3. SIMLIN Procedure Output – Structural Coefficients

	Simulation of	Klein's Model I	using SIMLIN						
	The	SIMLIN Procedu	re						
Structural Coefficients for Endogenous Variables									
Variable	с	р	w	i					
С	1.0000	-0.1249							
i	•	0.0131	•	1.0000					
w	•	•	1.0000	•					
x	-1.0000	•	•	-1.0000					
У	-1.0000	•	•	-1.0000					
p	•	1.0000	1.0000	•					
k	•	•	•	-1.0000					
wsum	•	•	-1.0000	•					
St	ructural Coeffi	cients for Endo	genous Variable	s					
Variable	x	wsum	k	У					
С		-0.7901							
i	•	•	•	•					
w	-0.4005	•	•	•					
x	1.0000	•	•	•					
	•	•	•	1.0000					
Y			_						
y p	-1.0000	•	•	•					
=	-1.0000	•	1.0000	•					

	Simulat	ion of Klein's N	Model I using :	SIMLIN							
	The SIMLIN Procedure										
	Structural Coefficients for Lagged Endogenous Variables										
	Variable	klag	plag	xlag							
	С		0.1631								
	i	-0.1948	0.7557	•							
	W	•	•	0.1813							
	x	•	•	•							
	Y	•	•	•							
	P	•	•	•							
	k	1.0000	•	•							
	wsum	•	•	•							
	Structural	Coefficients fo	or Exogenous Va	ariables							
Variable	wp	g	t	yr	Intercept						
с					16.4408						
i	•	•	•	•	28.1778						
w	•	•	•	0.1497	1.7972						
x	•	1.0000	•	•	0						
У	•	1.0000	-1.0000	•	0						
p	•	•	-1.0000	•	0						
k	•	•	•	•	0						
wsum	1.0000	•	•	•	0						

Part 2. General Information

The SIMLIN procedure then prints the inverse of the endogenous variables coefficient matrix, as shown in Output 16.1.4.

Output 16.1.4. SIMLIN Procedure Output – Inverse Coefficient Matrix

	Simulation of	Klein's Model I	I using SIMLIN						
The SIMLIN Procedure									
Inve	rse Coefficient	Matrix for End	dogenous Variabl	.es					
Variable	С	i	w	x					
С	1.6347	0.6347	1.0957	0.6347					
p	0.9724	0.9724	-0.3405	0.9724					
w	0.6496	0.6496	1.4406	0.6496					
i	-0.0127	0.9873	0.004453	-0.0127					
x	1.6219	1.6219	1.1001	1.6219					
wsum	0.6496	0.6496	1.4406	0.6496					
k	-0.0127	0.9873	0.004453	-0.0127					
Y	1.6219	1.6219	1.1001	0.6219					
Inve	rse Coefficient	Matrix for End	dogenous Variabl	es					
Variable	У	р	k	wsum					
С	0	0.1959	0	1.2915					
p	0	1.1087	0	0.7682					
w	0	0.0726	0	0.5132					
i	0	-0.0145	0	-0.0100					
x	0	0.1814	0	1.2815					
wsum	0	0.0726	0	1.5132					
k	0	-0.0145	1.0000	-0.0100					
У	1.0000	0.1814	0	1.2815					

The SIMLIN procedure next prints the reduced form coefficient matrices, as shown in Output 16.1.5.

Output 16.1.5. SIMLIN Procedure Output – Reduced Form Coefficients

	Simulat	ion of Klein's	Model I using	SIMLIN					
The SIMLIN Procedure									
	Reduced F	orm for Lagged	Endogenous Va	riables					
	Variable	klag	plag	xlag					
	С	-0.1237	0.7463	0.1986					
	p	-0.1895	0.8935	-0.0617					
	w	-0.1266	0.5969	0.2612					
	i	-0.1924	0.7440	0.000807					
	x	-0.3160	1.4903	0.1994					
	wsum	-0.1266	0.5969	0.2612					
	k	0.8076	0.7440	0.000807					
	Y	-0.3160	1.4903	0.1994					
	Redu	ced Form for Ex	ogenous Varia	bles					
Variable	wp	g	t	yr	Intercept				
С	1.2915	0.6347	-0.1959	0.1640	46.7273				
p	0.7682	0.9724	-1.1087	-0.0510	42.7736				
w	0.5132	0.6496	-0.0726	0.2156	31.5721				
i	-0.0100	-0.0127	0.0145	0.000667	27.6184				
x	1.2815	1.6219	-0.1814	0.1647	74.3457				
wsum	1.5132	0.6496	-0.0726	0.2156	31.5721				
k	-0.0100	-0.0127	0.0145	0.000667	27.6184				
У	1.2815	1.6219	-1.1814	0.1647	74.3457				

The multiplier matrices (requested by the INTERIM=2 and TOTAL options) are printed next, as shown in Output 16.1.6.

Output 16.1.6. SIMLIN Procedure Output – Multipliers

	Simulat	ion of Klein's	s Model I using	SIMLIN					
The SIMLIN Procedure									
Interim Multipliers for Interim 1									
Variable	qw	g	t	yr	Intercept				
С	0.829130	1.049424	-0.865262	0054080	43.27442				
p	0.609213	0.771077	-0.982167	0558215	28.39545				
w	0.794488	1.005578	-0.710961	0.0125018	41.45124				
i	0.574572	0.727231	-0.827867	0379117	26.57227				
x	1.403702	1.776655	-1.693129	0433197	69.84670				
wsum	0.794488	1.005578	-0.710961	0.0125018	41.45124				
k	0.564524	0.714514	-0.813366	0372452	54.19068				
У	1.403702	1.776655	-1.693129	0433197	69.84670				
	Int	erim Multiplie	ers for Interi	n 2					
Variable	wp	g	t	yr	Intercept				
С	0.663671	0.840004	-0.968727	0456589	28.36428				
p	0.350716	0.443899	-0.618929	0401446	10.79216				
w	0.658769	0.833799	-0.925467	0399178	28.33114				
i	0.345813	0.437694	-0.575669	0344035	10.75901				
x	1.009485	1.277698	-1.544396	0800624	39.12330				
wsum	0.658769	0.833799	-0.925467	0399178	28.33114				
k	0.910337	1.152208	-1.389035	0716486	64.94969				
У	1.009485	1.277698	-1.544396	0800624	39.12330				

	Simulat	ion of Klein's	s Model I using	SIMLIN					
The SIMLIN Procedure									
Total Multipliers									
Variable	wp	g	t	yr	Intercept				
С	1.881667	1.381613	-0.685987	0.1789624	41.3045				
p	0.786945	0.996031	-1.286891	0748290	15.4770				
w	1.094722	1.385582	-0.399095	0.2537914	25.8275				
i	0.000000	0.00000	-0.000000	0.0000000	0.0000				
x	1.881667	2.381613	-0.685987	0.1789624	41.3045				
wsum	2.094722	1.385582	-0.399095	0.2537914	25.8275				
k	2.999365	3.796275	-4.904859	2852032	203.6035				
У	1.881667	2.381613	-1.685987	0.1789624	41.3045				

The last part of the SIMLIN procedure output is a table of statistics of fit for the simulation, as shown in Output 16.1.7.

Output 16.1.7. SIMLIN Procedure Output – Simulation Statistics

Simulation of Klein's Model I using SIMLIN									
The SIMLIN Procedure									
Fit Statistics									
		Mean	Mean Pct	Mean Abs	Mean Abs	RMS	RMS Pct		
Variable	N	Error	Error	Error	Pct Error	Error	Error		
С	21	0.1367	-0.3827	3.5011	6.69769	4.3155	8.1701		
p	21	0.1422	-4.0671	2.9355	19.61400	3.4257	26.0265		
w	21	0.1282	-0.8939	3.1247	8.92110	4.0930	11.4709		
i	21	0.1337	105.8529	2.4983	127.13736	2.9980	252.3497		
x	21	0.2704	-0.9553	5.9622	10.40057	7.1881	12.5653		
wsum	21	0.1282	-0.6669	3.1247	7.88988	4.0930	10.1724		
k	21	-0.1424	-0.1506	3.8879	1.90614	5.0036	2.4209		
У	21	0.2704	-1.3476	5.9622	11.74177	7.1881	14.2214		

The OUTEST= output data set contains all the observations read from the EST= data set, and in addition contains observations for the reduced form and multiplier matrices. The following statements produce a partial listing of the OUTEST= data set, as shown in Output 16.1.8.

```
proc print data=b;
   where _type_ = 'REDUCED' | _type_ = 'IMULT1';
run;
```

Output 16.1.8. Partial Listing of OUTEST= Data Set

				S	imulation	n of Kle	ein's	Model	I usi	ng :	SIMLI	N				
		_ D														
		E	— м	s												
	_ T	P		I												
	Y	v		G								w				
0	P	A		М								s				
b	E	R		A								u				
s	_	_	_	_	С	p		w	i	3	x	m	k		У	
9	REDUCED	С			1.63465	0.6346	5 1.0	9566	0.634	65 (0 0.	19585	0	1.	29151	
	REDUCED			•	0.97236				0.972			10872			76825	
	REDUCED	_			0.64957	0.6495	7 1.4	4059	0.649			07263			51321	
12	REDUCED	i			-0.01272	0.9872	0.0	0445 -	-0.012	72 (0 -0.	01450	0	-0.	01005	
13	REDUCED	x			1.62194	1.6219	4 1.1	0011	1.621	94 (0 0.	18135	0	1.	28146	
14	REDUCED	wsu	ım		0.64957	0.6495	7 1.4	4059	0.649	57 (0 0.	07263	0	1.	51321	
15	REDUCED	k			-0.01272	0.9872	0.0	0445 -	-0.012	72 (0 -0.	01450	1	-0.	01005	
16	REDUCED	У			1.62194	1.6219	4 1.1	0011	0.621	94	1 0.	18135	0	1.	28146	
17	IMULT1	C			•	•			•				•	•		
18	IMULT1	р			•	•			•				•	•		
19	IMULT1	w			•				•				•	•		
20	IMULT1	i		•	•				•				•			
21	IMULT1	x		•	•				•				•			
	IMULT1	wsu	ım	•	•				•				•			
23	IMULT1	k		•	•	•	•		•				•			
24	IMULT1	У		•	•	•	•		•				•	•		
															I	
															n	
															t	
															е	
															r	
	k		Р		x										С	
0	1		1		1										е	
b	a		а		a		w						У		р	
ន	g		g		g		p	g	J		t		r		t	
9	-0.12366	5 (.74	631	0.1986	53 1.2	29151	0.63	3465	-0.	19585	0.	163	399	46.72	273
	-0.18946		.89				76825		7236		10872				42.7	
L1	-0.12657	7 (.59	687	0.2613	L7 0.	51321	0.64	1957	-0.0	07263	0.	215	62	31.5	721
12	-0.1923	7 (.74	404	0.0008	31 -0.0	01005	-0.03	L272	0.0	01450	0.	000	67	27.63	L84
13	-0.31603	3 1	L .4 9	034	0.1994	44 1.2	28146	1.62	2194	-0.3	18135	0.	164	166	74.34	157
L4	-0.12657	7 (.59	687	0.2613	1.	51321	0.64	1957	-0.0	07263	0.	215	62	31.5	721
15	0.80763	3 (.74	404	0.0008		01005	-0.03			01450		000	67	27.63	
16	-0.31603	3 1	L . 49	034	0.1994	14 1.	28146	1.62	2194	-1.3	18135	0.	164	166	74.34	£57
17	•						32913				86526				43.2	
18						0.0	50921	0.7	7108		98217		055	82	28.39	€35
19							79449	1.00	558		71096		012	250	41.45	512
20	•				•		57457		2723		82787				26.5	
21	•						10370		7666		69313				69.84	167
						0.	79449	1.00	0558	-0.	71096	0.	012	250	41.45	512
	•		•													
22 23	•						56452	0.7	L451	-0.8	81337	-0.	037	725	54.19	907

The actual and predicted values for the variable C are plotted in Output 16.1.9.

```
title2 h=1 'Plots of Simulation Results';
symbol1 i=none v=star;
symbol2 i=join v=circle;
proc gplot data=c;
    plot c*year=1 chat*year=2 / overlay href=1941.5;
run;
```

Simulation of Klein's Model I using SIMLIN
Plots of Simulation Results

80

70

0

n

50

1920

1930

1940

1950

Output 16.1.9. Plot of Actual and Predicted Consumption

Example 16.2. Multipliers for a Third-Order System

This example shows how to fit and simulate a single equation dynamic model with third-order lags. It then shows how to convert the third-order equation into a three equation system with only first-order lags, so that the SIMLIN procedure can compute multipliers. (See the section "Multipliers for Higher Order Lags" earlier in this chapter for more information.)

The input data set TEST is created from simulated data. A partial listing of the data set TEST produced by PROC PRINT is shown in Output 16.2.1.

```
title1 'Simulate Equation with Third-Order Lags';
title2 'Listing of Simulated Input Data';
proc print data=test(obs=10);
run;
```

Output 16.2.1. Partial Listing of Input Data Set

Simulate Equation with Third-Order Lags Listing of Simulated Input Data							
Obs	У	ylag1	ylag2	ylag3	x	n	
1	8.2369	8.5191	6.9491	7.8800	-1.2593	1	
2	8.6285	8.2369	8.5191	6.9491	-1.6805	2	
3	10.2223	8.6285	8.2369	8.5191	-1.9844	3	
4	10.1372	10.2223	8.6285	8.2369	-1.7855	4	
5	10.0360	10.1372	10.2223	8.6285	-1.8092	5	
6	10.3560	10.0360	10.1372	10.2223	-1.3921	6	
7	11.4835	10.3560	10.0360	10.1372	-2.0987	7	
8	10.8508	11.4835	10.3560	10.0360	-1.8788	8	
9	11.2684	10.8508	11.4835	10.3560	-1.7154	9	
10	12.6310	11.2684	10.8508	11.4835	-1.8418	10	

The REG procedure processes the input data and writes the parameter estimates to the OUTEST= data set A.

```
title2 'Estimated Parameters';
proc reg data=test outest=a;
  model y=ylag3 x;
run;

title2 'Listing of OUTEST= Data Set';
proc print data=a;
run;
```

Output 16.2.2 shows the printed output produced by the REG procedure, and Output 16.2.3 displays the OUTEST= data set A produced.

Output 16.2.2. Estimates and Fit Information from PROC REG

```
Simulate Equation with Third-Order Lags
                             Estimated Parameters
                              The REG Procedure
                                Model: MODEL1
                            Dependent Variable: y
                             Analysis of Variance
                                    Sum of
                                                     Mean
Source
                         DF
                                   Squares
                                                   Square
                                                              F Value
                                                                         Pr > F
                                 173.98377
Model
                          2
                                                 86.99189
                                                              1691.98
                                                                         < .0001
Error
                                   1.38818
                                                   0.05141
Corrected Total
                         29
                                 175.37196
             Root MSE
                                   0.22675
                                              R-Square
                                                            0.9921
             Dependent Mean
                                  13.05234
                                              Adj R-Sq
                                                            0.9915
             Coeff Var
                                   1.73721
                             Parameter Estimates
                          Parameter
                                          Standard
     Variable
                           Estimate
                                                      t Value
                                             Error
                                                                 Pr > |t|
     Intercept
                            0.14239
                                           0.23657
                                                                    0.5523
                   1
                                                         0.60
     ylag3
                   1
                            0.77121
                                           0.01723
                                                         44.77
                                                                    <.0001
                                           0.10843
                                                                    <.0001
                   1
                           -1.77668
                                                        -16.39
```

Output 16.2.3. The OUTEST= Data Set Created by PROC REG

```
Simulate Equation with Third-Order Lags
Listing of OUTEST= Data Set

Obs _MODEL_ _TYPE_ _DEPVAR_ _RMSE_ Intercept ylag3 x y

1 MODEL1 PARMS y 0.22675 0.14239 0.77121 -1.77668 -1
```

The SIMLIN procedure processes the TEST data set using the estimates from PROC REG. The following statements perform the simulation and write the results to the OUT= data set OUT2.

```
title2 'Simulation of Equation';
proc simlin est=a data=test nored;
  endogenous y;
  exogenous x;
  lagged ylag3 y 3;
  id n;
  output out=out1 predicted=yhat residual=yresid;
run;
```

The printed output from the SIMLIN procedure is shown in Output 16.2.4.


Output 16.2.4. Output Produced by PROC SIMLIN

```
Simulate Equation with Third-Order Lags
                             Simulation of Equation
                              The SIMLIN Procedure
                                Fit Statistics
                      Mean
                            Mean Pct Mean Abs
                                                  Mean Abs
                                                                  RMS
                                                                        RMS Pct
Variable
                                                 Pct Error
                     Error
                                Error
                                          Error
                                                                Error
                                                                          Error
              30
                    -0.0233
                              -0.2268
                                         0.2662
                                                    2.05684
                                                               0.3408
                                                                          2.6159
У
```

The following statements plot the actual and predicted values, as shown in Output 16.2.5.

```
title2 'Plots of Simulation Results';
symbol1 i=none v=star;
symbol2 i=join v=circle;
proc gplot data=out1;
    plot yhat*n=1 y*n=2 / overlay;
run;
```

Output 16.2.5. Plot of Predicted and Actual Values

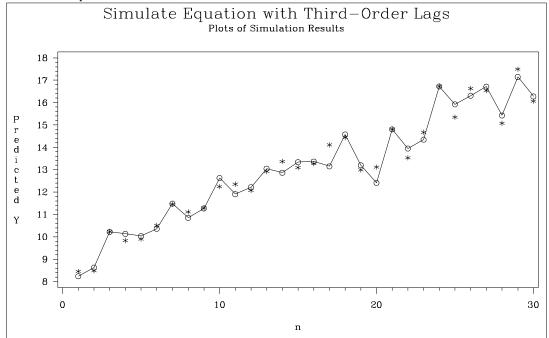

Next, the input data set TEST is modified by creating two new variables, YLAG1X and YLAG2X, that are equal to YLAG1 and YLAG2. These variables are used in the SYSLIN procedure. (The estimates produced by PROC SYSLIN are the same as before and are not shown.) A listing of the OUTEST= data set B created by PROC SYSLIN is shown in Output 16.2.6.

```
data test2;
    set test;
    ylag1x=ylag1;
    ylag2x=ylag2;
run;

title2 'Estimation of parameters and definition of identities';
proc syslin data=test2 outest=b;
    endogenous y ylag1x ylag2x;
    model y=ylag3 x;
    identity ylag1x=ylag1;
    identity ylag2x=ylag2;
run;

title2 'Listing of OUTEST= data set from PROC SYSLIN';
proc print data=b;
run;
```

Output 16.2.6. Listing of OUTEST= Data Set Created from PROC SYSLIN

```
Simulate Equation with Third-Order Lags
              Listing of OUTEST= data set from PROC SYSLIN
                    _ D
             Т
                   ΜE
 Т
                   O P
                            I
             Α
                                    r
                                           У
                                                       УУ
             Т
                   D V
                            G
                            M
O P
             U
                   ΕA
                                    е
                                           a
                                                       a a
                   LR
                            A
                                    р
                                                       g g
                                           g
                                                       12 y x x
                       0.22675 0.14239 0.77121 -1.77668 . . -1 .
         0 Converged y y
2 IDENTITY 0 Converged ylaglx . 0.00000 .
                                                . 1..-1.
3 IDENTITY 0 Converged ylag2x .
                                  0.00000 .
                                                       . 1
```

The SIMLIN procedure is used to compute the reduced form and multipliers. The OUTEST= data set B from PROC SYSLIN is used as the EST= data set for the SIMLIN procedure. The following statements perform the multiplier analysis.

```
title2 'Simulation of transformed first-order equation system';
proc simlin est=b data=test2 total interim=2;
  endogenous y ylag1x ylag2x;
  exogenous x;
  lagged ylag1 y 1 ylag2 ylag1x 1 ylag3 ylag2x 1;
  id n;
  output out=out2 predicted=yhat residual=yresid;
run;
```

Output 16.2.7 shows the interim 2 and total multipliers printed by the SIMLIN procedure.

Output 16.2.7. Interim 2 and Total Multipliers

Simulate Equ	ation with Thir	d-Order Lags
Simulation of trans	formed first-or	der equation system
Th	ne SIMLIN Proced	lure
Interim M	Multipliers for	Interim 2
Variable	x	Intercept
У	0.00000	0.000000
ylag1x	0.00000	0.000000
ylag2x	-1.776682	0.1423865
Т	otal Multiplier	`s
Variable	x	Intercept
У	-7.765556	0.6223455
ylag1x	-7.765556	0.6223455
ylag2x	-7.765556	0.6223455

References

Maddala, G.S (1977), Econometrics, New York: McGraw-Hill Book Co.

Pindyck, R.S. and Rubinfeld, D.L. (1991), *Econometric Models and Economic Fore-casts*, Third Edition, New York: McGraw-Hill Book Co.

Theil, H. (1971), Principles of Econometrics, New York: John Wiley & Sons, Inc.

The correct bibliographic citation for this manual is as follows: SAS Institute Inc., SAS/ETS User's Guide, Version 8, Cary, NC: SAS Institute Inc., 1999. 1546 pp.

SAS/ETS User's Guide, Version 8

Copyright © 1999 by SAS Institute Inc., Cary, NC, USA.

ISBN 1-58025-489-6

All rights reserved. Printed in the United States of America. No part of this publication may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise, without the prior written permission of the publisher, SAS Institute Inc.

U.S. Government Restricted Rights Notice. Use, duplication, or disclosure of the software by the government is subject to restrictions as set forth in FAR 52.227–19 Commercial Computer Software-Restricted Rights (June 1987).

SAS Institute Inc., SAS Campus Drive, Cary, North Carolina 27513.

1st printing, October 1999

 $SAS^{\$}$ and all other SAS Institute Inc. product or service names are registered trademarks or trademarks of SAS Institute Inc. in the USA and other countries. indicates USA registration.

Other brand and product names are registered trademarks or trademarks of their respective companies.

The Institute is a private company devoted to the support and further development of its software and related services.